


Continental Western Corporation

STEEL & PLASTIC STRAPPING



a low cost tension method of securing plactic

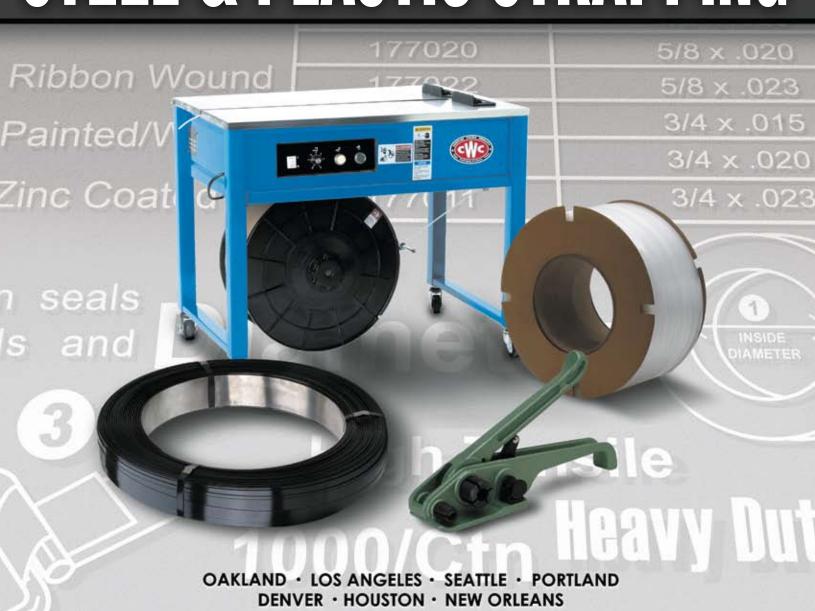



For over 75 years, Continental Western Corporation (CWC) has been proud to provide our distributors with quality products, timely delivery and outstanding customer service. In order to better serve your needs and become your one stop supplier, CWC is happy to offer you our Steel and Plastic Strapping Products Catalog.

CWC has carefully selected the products in this catalog to ensure the highest quality and value possible. Every item has been carefully selected for its performance and durability. CWC strives to provide the highest level of quality goods in the industry.

CWC takes pride in the accurate and timely deliveries of our orders. We maintain large inventory levels in all of our seven warehouse locations to give us the ability to ship same day or next day after we receive your order.

CWC has a highly trained and knowledgeable sales staff to assist you with your strapping product needs.

CWC sincerely appreciates the opportunity to serve you. The next time you need strapping products, please allow CWC to be your vendor of choice. We will be happy to quote you on the products in this catalog, as well as any other product requirements you may have.

Frederick Oshay Chief Executive **Todd Williams**President

 $3/4 \times .020$

3/4 x .023



nc Coated

table of contents

Page 1..... STEEL strapping

Page 2 STEEL strapping seals

Page 3..... STEEL tools

Pages 4 - 6. . . PLASTIC strapping

Page 7 PLASTIC strap tools and accessories

Page 8 PLASTIC buckles and seals

www.cwestern.com



Steelstrapping

Standard Duty

| | STRAP SIZE | | | | SPECIFICATIONS | | | | | |
|---------|--------------------|-----------|------------------|--------------------|------------------|-----------------|-----------------|--|--|--|
| Item No | Width Thickness | Ft/ Lb | Nominal Break | Approx. Wt/Coil | Coils/ Pallet | Coil Winding | Strap Finish | | | |
| 177009 | 3/8" x .020 | 39.2 | 917 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177002 | 1/2" x .015 | 39.3 | 922 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177005 | 1/2" x .020 | 29.4 | 1,223 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177118 | 1/2" x .020 | 29.4 | 1,223 lbs | 95-100 lbs | 14 | OS | Z | | | |
| 177007 | 1/2" x .023 | 25.6 | 1,392 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177020 | 5/8" x .020 | 23.6 | 1,508 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177021 | 5/8" x .020 | 23.6 | 1,508 lbs | 95-100 lbs | 14 | OS | Z | | | |
| 177022 | 5/8" x .023 | 20.5 | 1,738 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177013 | 3/4" x .020 | 19.6 | 1,812 lbs | 95-100 lbs | 14 | OS | P/W | | | |
| 177011 | 3/4" x .023 | 17.1 | 2,076 lbs | 95-100 lbs | 14 | OS | P/W | | | |

OS = Oscillated RW = Ribbon Wound P/W = Painted and Waxed Z= Zinc Coated

OSCILLATED

Steel strapping is wound in a uniform pattern to a coil width of 2-7/8".

RIBBON WOUND

Steel strapping is wound onto itself so that the width of the coil is the same as the width of the strap.

STANDARD DUTY STEEL STRAPPING

A low carbon form of steel strapping made for low to medium usage. This type of strapping is typically used for package reinforcement, unitizing, palletizing, box closure and bundling.



Heavy Duty

| | - | | | | | | |
|---------|--------------------|-----------|------------------|--------------------|------------------|-----------------|-----------------|
| | STRA | P SIZE | | | SPECIFICATIONS | | |
| Item No | Width Thickness | Ft/ Lb | Nominal Break | Approx. Wt/Coil | Coils/ Pallet | Coil Winding | Strap Finish |
| 177006 | 1/2" x .020 | 29.4 | 1,250 lbs | 95-100 lbs | 14 | OS | P/W |
| 177019 | 5/8" x .020 | 23.6 | 1,565 lbs | 95-100 lbs | 14 | OS | P/W |
| 177024 | 5/8" x .020 | 23.6 | 1,565 lbs | 95-100 lbs | 14 | OS | Z |
| 177023 | 5/8" x .023 | 20.5 | 1,779 lbs | 95-100 lbs | 14 | OS | P/W |
| 177012 | 3/4" x .020 | 19.6 | 1,856 lbs | 95-100 lbs | 14 | OS | P/W |
| 177113 | 3/4" x .020 | 19.6 | 1,856 lbs | 95-100 lbs | 14 | OS | Z |
| 177017 | 3/4" x .023 | 17.1 | 2,135 lbs | 95-100 lbs | 14 | OS | P/W |
| 177014 | 3/4" x .025 | 15.7 | 2,360 lbs | 95-100 lbs | 14 | OS | P/W |
| 177114 | 3/4" x .025 | 15.7 | 2,360 lbs | 95-100 lbs | 14 | OS | Z |
| 177010 | 3/4" x .029 | 13.3 | 2,735 lbs | 95-100 lbs | 14 | OS | P/W |
| 177015 | 3/4" x .031 | 12.7 | 2,927 lbs | 95-100 lbs | 14 | OS | P/W |
| 177030 | 1-1/4" x .029 | 8.1 | 4,537 lbs | 95-100 lbs | 22 | RW | P/W |
| 177031 | 1-1/4" x .029 | 8.1 | 4,537 lbs | 95-100 lbs | 22 | RW | Z |
| 177032 | 1-1/4" x .031 | 7.6 | 4,850 lbs | 95-100 lbs | 22 | RW | P/W |
| 177029 | 1-1/4" x .031 | 7.6 | 4,850 lbs | 95-100 lbs | 22 | RW | Z |

HEAVY DUTY STEEL STRAPPING

This is a medium carbon, cold rolled steel strap. Depending on the application, it has similar characteristics to high tensile steel. It provides higher tensile strengths and elongation over regular duty strap. It is ideal for heavy applications such as brick, steel coils and lumber when unitizing is required. AAR strap available upon request.





Steelstrapping seals

Mini-Coils

| Item No | Item | Width Thickness | Approx. Length |
|---------|-----------------|--------------------|-------------------|
| 177008 | Steel Mini-Coil | 1/2" x .020 | 300' |
| 177205 | Steel Mini-Coil | 1/2" x .023 | 300' |
| 177206 | Steel Mini-Coil | 5/8" x .020 | 300' |
| 177207 | Steel Mini-Coil | 5/8" x .023 | 300' |
| 177208 | Steel Mini-Coil | 3/4" x .020 | 300' |
| 177209 | Steel Mini-Coil | 3/4" x .023 | 300' |

MINI-COILS

For convenience, these coils are packed in self-dispensing cartons.



Steel Strapping Seals - Standard Duty

| Item No | Seal Type | Size | Length | Mil Gauge | Qty/Ctn | Wt/Ctn |
|---------|-----------|------|--------|-----------|---------|--------|
| 175030 | Open | 3/8" | 1.000" | .020 | 5,000 | 25 lbs |
| 175031 | Open | 1/2" | 1.125" | .020 | 2,500 | 15 lbs |
| 175758 | Push | 1/2" | .875" | .025 | 2,500 | 23 lbs |
| 175036 | Open | 5/8" | 1.125" | .020 | 2,500 | 18 lbs |
| 175756 | Push | 5/8" | .875" | .025 | 2,500 | 25 lbs |
| 175741 | Open | 3/4" | 1.125" | .020 | 2,500 | 20 lbs |
| 175743 | Push | 3/4" | .875" | .025 | 2,500 | 28 lbs |
| 175740 | Magazine | 3/4" | 1.125" | .020 | 5,000 | 45 lbs |

Steel Strapping Seals - Heavy Duty

| Item No | Seal Type | Size | Length | Mil Gauge | Qty/Ctn | Wt/Ctn |
|---------|-----------|--------|--------|-----------|---------|--------|
| 175755 | Open | 3/4" | 1.75" | .030 | 2,000 | 50 lbs |
| 175044 | Push | 3/4" | 1.75" | .030 | 2,000 | 62 lbs |
| 175760 | Open | 1-1/4" | 2.25" | .030 | 1,000 | 47 lbs |
| 175761 | Push | 1-1/4" | 2.25" | .030 | 1,000 | 68 lbs |

STEEL STRAPPING SEALS

Selection of the seal is determined by the type of tool or machine that applies the strap.



OPEN

Open seals snap onto overlapping strap ends prior or after tensioning. Used in applications with a flat working surface.



PUSH

Push or closed seals are used in strap applications involving round or irregular shaped packages. Strap is threaded through the seal.



MAGAZINE

Clips of 50-100 open seals for combination tools and strapping machines.



STEEL tools

Compact Steel Strap Tensioner

176721 - Use with 3/8" to 3/4" strapping, .015 - .023 gauge

176707 - Domestic version, same as above



Medium Steel Strap Tensioner

176722 - Use with 3/8" to 3/4" strapping, .015 - .025 gauge

176729 - Domestic version, same as above



Heavy Duty Steel Strap Tensioner

176720 - Use with 3/4" to 1-1/4" strapping, .025 - .031 gauge

176718 - Domestic version, same as above



Compact Feedwheel Pusher Tensioner

176044 - Use with 3/8" to 3/4" strapping, .015 - .025 gauge



Heavy Duty Feedwheel Pusher Tensioner

176045 - Use with 5/8" to 1-1/4" strapping, .023 -.031 gauge



Double Notch Steel Strap Sealer/Crimper

176712, 176733, 176738 Use with 1/2" strapping, .015 - .023 gauge 176713, 176734, 176739 Use with 5/8" strapping, .015 - .023 gauge 176715, 176735, 176732 Use with 3/4" strapping, .015 - .023 gauge



Steel Strap Shears

176710 - Use with 3/8" to 1-1/4" strapping, .015 - .031 gauge

176708 - Domestic version, same as above



Heavy Duty Steel Strap Sealer/Crimper

176743 - Double Notch use with 3/4" strapping, .023 - .031 gauge

176717 - Double Notch use with 1-1/4" strapping, .025 - .035 gauge

176719 - Single Notch use with 1-1/4" strapping, .025 - .035 gauge



Steel and Poly Strap Dispenser

Single Handle

176725 - 6" steel wheels

176049 - 7" rubber wheels

176050 - 6" plastic wheels

Two Handle

176051 - 10" rubber wheels

Accepts 3", 6", & 8" width coils and 8" & 16" cores. Includes a brake and a tool tray.



Heavy Duty Steel & Poly Strap Dispenser

176726 - 8" steel and rubber wheels. Accepts 3" width coils with 6" cores. For use with ribbon and oscillated wound strapping.

176727 - 10" steel and rubber wheels. Accepts ribbon wound steel strap only.

176758 - 8" steel and rubber wheel. Accepts all core sizes.

Two handle dispensers which include a strap troller and a large tool tray.



A wide range of other tools are available.



PLASTIC strapping

Hand Grade Polypropylene

| Item No | Stock No | Color | Width Thickness | Ft/Coil | Core Size | Nominal Break | Wt/Coil | Coils/ Pallet | | | |
|---------|----------|--------|--------------------|---------|--------------|------------------|---------|------------------|--|--|--|
| 170710 | HC716B | Black | 7/16" x .025 | 8,000 | 16 x 6 | 500 lbs | 35 lbs | 12 | | | |
| 178005 | 2554EB | Black | 1/2" x .015 | 9,000 | 8 x 8 | 300 lbs | 20 lbs | 24 | | | |
| 178010 | 2558EB | Black | 1/2" x .015 | 9,000 | 16 x 6 | 300 lbs | 25 lbs | 28 | | | |
| 178012 | 3003EB | Black | 1/2" x .015 | 4,500 | 16 x 3 | 300 lbs | 15 lbs | 56 | | | |
| 178020 | 3004EB | Black | 1/2" x .017 | 9,000 | 8 x 8 | 350 lbs | 26 lbs | 24 | | | |
| 178015 | 3004EY | Yellow | 1/2" x .017 | 9,000 | 8 x 8 | 350 lbs | 26 lbs | 24 | | | |
| 178035 | 3008EB | Black | 1/2" x .017 | 9,000 | 16 x 6 | 350 lbs | 26 lbs | 28 | | | |
| 178030 | 3008EY | Yellow | 1/2" x .017 | 9,000 | 16 x 6 | 350 lbs | 26 lbs | 28 | | | |
| 178050 | 4008EB | Black | 1/2" x .018 | 9,000 | 16 x 6 | 400 lbs | 29 lbs | 28 | | | |
| 178057 | 4503EB | Black | 1/2" x .020 | 3,600 | 16 x 3 | 450 lbs | 18 lbs | 56 | | | |
| 178060 | 4508EB | Black | 1/2" x .020 | 7,200 | 16 x 6 | 450 lbs | 26 lbs | 28 | | | |
| 178062 | 6003EB | Black | 1/2" x .031 | 3,600 | 16 x 3 | 600 lbs | 17 lbs | 56 | | | |
| 178063 | 6003EY | Yellow | 1/2" x .031 | 3,600 | 16 x 3 | 600 lbs | 17 lbs | 56 | | | |
| 178070 | 6004EY | Yellow | 1/2" x .031 | 7,200 | 8 x 8 | 600 lbs | 32 lbs | 24 | | | |
| 178075 | 6004EB | Black | 1/2" x .031 | 7,200 | 8 x 8 | 600 lbs | 32 lbs | 24 | | | |
| 178090 | 6008EY | Yellow | 1/2" x .031 | 7,200 | 16 x 6 | 600 lbs | 34 lbs | 28 | | | |
| 178095 | 6008EB | Black | 1/2" x .031 | 7,200 | 16 x 6 | 600 lbs | 34 lbs | 28 | | | |
| 178096 | 7003EB | Black | 5/8" x .025 | 2,600 | 16 x 3 | 700 lbs | 15 lbs | 56 | | | |
| 178097 | 9003EB | Black | 5/8" x .030 | 2,200 | 16 x 3 | 900 lbs | 16 lbs | 56 | | | |
| 178099 | 9008EB | Black | 5/8" x .030 | 5,400 | 16 x 6 | 900 lbs | 36 lbs | 28 | | | |
| 178098 | 10303EB | Black | 5/8" x .031 | 2,200 | 16 x 3 | 1,000 lbs | 17 lbs | 56 | | | |
| 178100 | 10504EB | Black | 3/4" x .033 | 4,500 | 8 x 8 | 1,050 lbs | 34 lbs | 24 | | | |



HAND GRADE POLYPROPYLENE

Items with a core size ending in 3 (example 16 x 3) are packed 2 coils/carton. All others are 1 coil/carton.

Machine Grade Polypropylene

| | | | - / 1- | - 1- / | | | | |
|---------|----------|--------|--------------------|---------|--------------|------------------|---------|------------------|
| Item No | Stock No | Color | Width Thickness | Ft/Coil | Core Size | Nominal Break | Wt/Coil | Coils/ Pallet |
| 178275 | PM 5130W | White | 5mm x .018 | 24,000 | 8 x 8 | 110 lbs | 28 lbs | 24 |
| 178413 | PM 9200Y | Yellow | 1/4" x .022 | 18,000 | 9 x 8 | 200 lbs | 30 lbs | 24 |
| 178380 | PM 8200Y | Yellow | 1/4" x .022 | 18,000 | 8 x 8 | 200 lbs | 29 lbs | 24 |
| 178405 | PM 9155W | White | 1/4" x .022 | 20,000 | 9 x 8 | 200 lbs | 32 lbs | 24 |
| 178410 | PM 9155Y | Yellow | 1/4" x .022 | 20,000 | 9 x 8 | 200 lbs | 32 lbs | 24 |
| 171034 | PM 1418W | White | 1/4" x .022 | 13,120 | 11 x 8 | 200 lbs | 22 lbs | 28 |
| 178385 | PM 8250W | White | 3/8" x .022 | 12,900 | 8 x 8 | 300 lbs | 30 lbs | 24 |
| 178415 | PM 9265W | White | 3/8" x .022 | 12,900 | 9 x 8 | 300 lbs | 30 lbs | 24 |
| 178387 | PM 8260W | White | 3/8" x .022 | 10,000 | 8 x 6 | 300 lbs | 23 lbs | 24 |
| 178203 | SA 8250B | Black | 1/2" x .018 | 9,000 | 8 x 8 | 250 lbs | 23 lbs | 24 |
| 178205 | SA 9250W | White | 1/2" x .018 | 9,000 | 9 x 8 | 250 lbs | 23 lbs | 24 |
| 178428 | PM 9300B | Black | 1/2" x .022 | 9,900 | 9 x 8 | 325 lbs | 28 lbs | 24 |
| 178395 | PM 8300B | Black | 1/2" x .022 | 9,900 | 8 x 8 | 325 lbs | 28 lbs | 24 |
| 178390 | PM 8300W | White | 1/2" x .022 | 9,900 | 8 x 8 | 325 lbs | 28 lbs | 24 |
| 178430 | PM 9300W | White | 1/2" x .022 | 9,900 | 9 x 8 | 325 lbs | 28 lbs | 24 |
| 178401 | PM 8500W | White | 1/2" x .024 | 7,200 | 8 x 8 | 500 lbs | 28 lbs | 24 |
| 178307 | PM 6500B | Black | 1/2" x .024 | 6,600 | 16 x 6 | 500 lbs | 27 lbs | 24 |
| 178360 | PM 6400B | Black | 1/2" x .024 | 8,900 | 16 x 6 | 400 lbs | 30 lbs | 24 |
| 178310 | PM 6500W | White | 1/2" x .024 | 6,600 | 16 x 6 | 500 lbs | 27 lbs | 24 |
| 178350 | PM 7350W | White | 1/2" x .025 | 7,500 | 11 x 8 | 350 lbs | 24 lbs | 24 |
| 178320 | PM 6600B | Black | 1/2" x .031 | 6,000 | 16 x 6 | 600 lbs | 29 lbs | 24 |
| 171151 | PM 6024Y | Yellow | 1/2" x .031 | 9,500 | 24 x 6 | 600 lbs | 49 lbs | 14 |



MACHINE GRADE POLYPROPYLENE

Custom colors available. Additional sizes available.



PLASTIC strapping

Machine Grade - Smooth Polypropylene

| Item No | Stock No | Color | Width Thickness | Ft/Coil | Core Size | Nominal Break | Wt/Coil | Coils/ Pallet |
|---------|----------|--------|--------------------|---------|--------------|------------------|---------|------------------|
| 171005 | WS 209C | Clear | 1/4" x .014 | 20,000 | 4 x 6 | 145 lbs | 25 lbs | 30 |
| 171010 | WS 209Y | Yellow | 1/4" x .014 | 20,000 | 4 x 6 | 145 lbs | 25 lbs | 30 |
| 171019 | WS 212SP | Clear | 1/4" x .018 | 16,750 | 8 x 7.5 | 200 lbs | 29 lbs | 24 |
| 171020 | WS 212C | Clear | 1/4" x .018 | 15,000 | 4 x 6 | 200 lbs | 25 lbs | 30 |
| 171025 | WS 212Y | Yellow | 1/4" x .018 | 15,000 | 4 x 6 | 200 lbs | 25 lbs | 30 |
| 171004 | MK 216Y | Yellow | 1/4" x .016 | 18,000 | 8 x 8 | 200 lbs | 30 lbs | 24 |
| 171046 | MK 616C | Clear | 3/8" x .016 | 12,000 | 8 x 8 | 300 lbs | 30 lbs | 24 |
| 171050 | PM 7604B | Black | 7/16" x .019 | 10,500 | 16 x 6 | 400 lbs | 33 lbs | 12 |
| 171049 | PM 7604C | Clear | 7/16" x .019 | 10,500 | 16 x 6 | 400 lbs | 33 lbs | 12 |
| 171051 | PM 7704B | Black | 7/16" x .025 | 8,000 | 16 x 6 | 500 lbs | 35 lbs | 12 |
| 171044 | PM 7704C | Clear | 7/16" x .025 | 8,000 | 16 x 6 | 500 lbs | 35 lbs | 12 |
| 171054 | PM 7160B | Black | 7/16" x .025 | 6,700 | 8 x 7.5 | 500 lbs | 29 lbs | 24 |
| 171052 | PM 7804B | Black | 7/16" x .030 | 7,000 | 16 x 6 | 600 lbs | 35 lbs | 12 |


For use in Signode® machine applications. Signode® is a registered trademark of ITW, Inc. Call for cross reference information.

Determining The Core Size

First, measure the inside diameter of the coil (1). Second, measure the width of the coil (2). Easy way to remember: Always measure inside-out.

TYPICAL CORE SIZES:

16" x 6" 16" x 3" 8" x 8" 9" x 8" 11" x 8" 4" x 6" 8" x 6"



STRAP FINISH:

Embossed or smooth depends on the equipment.

SPECIAL ORDERS:

192 coil minimum order.

NOTE:

Printed strap is also available.



Hand Grade or Machine Grade Polyester

| Item No | Stock No | Color | Width Thickness | Ft/Coil | Core Size | Nominal Break | Wt/Coil | Coils/ Pallet |
|---------|--------------|-------|--------------------|---------|--------------|------------------|---------|------------------|
| 173065 | PE1716-6 | Green | .41" x .021 | 10,500 | 16 x 6 | 500 lbs | 52 lbs | 28 |
| 173070 | PE1718-6 | Green | .41" x .024 | 9,000 | 16 x 6 | 600 lbs | 52 lbs | 28 |
| 173075 | PE1818-6 | Green | .47" x .021 | 9,000 | 16 x 6 | 600 lbs | 55 lbs | 24 |
| 173080 | PE1822-6 | Green | .47" x .028 | 6,500 | 16 x 6 | 800 lbs | 53 lbs | 24 |
| 173035 | PE2600-3 | Black | 1/2" x .020 | 3,600 | 16 x 3 | 600 lbs | 22 lbs | 56 |
| 173017 | PE2600-6 | Black | 1/2" x .020 | 7,200 | 16 x 6 | 600 lbs | 44 lbs | 28 |
| 173040 | PE2800-3 | Black | 1/2" x .025 | 2,900 | 16 x 3 | 775 lbs | 22 lbs | 56 |
| 173020 | PE2800-6 | Black | 1/2" x .025 | 5,800 | 16 x 6 | 775 lbs | 44 lbs | 28 |
| 173041 | PE2800-6 | Green | 1/2" x .025 | 5,800 | 16 x 6 | 775 lbs | 44 lbs | 28 |
| 173042 | PE2900-3 | Black | 1/2" x .028 | 3,250 | 16 x 3 | 820 lbs | 29 lbs | 56 |
| 173045 | PE1750-3 | Black | 5/8" x .020 | 2,850 | 16 x 3 | 750 lbs | 22 lbs | 56 |
| 173050 | PE1950-3 | Black | 5/8" x .025 | 2,200 | 16 x 3 | 900 lbs | 21 lbs | 56 |
| 173055 | PE1050-3 | Black | 5/8" x .030 | 1,800 | 16 x 3 | 1,100 lbs | 21 lbs | 56 |
| 173086 | P5830 | Green | 5/8" x .030 | 3,800 | 16 x 6 | 1,100 lbs | 44 lbs | 28 |
| 173084 | P5835 | Green | 5/8" x .035 | 4,000 | 16 x 6 | 1,400 lbs | 53 lbs | 28 |
| 173085 | P5835 AAR-65 | Green | 5/8" x .035 | 4,000 | 16 x 6 | 1,400 lbs | 53 lbs | 28 |
| 173087 | P5840 AAR-65 | Green | 5/8" x .040 | 4,000 | 16 x 6 | 1,600 lbs | 60 lbs | 28 |
| 173088 | P5840 | Green | 5/8" x .040 | 4,000 | 16 x 6 | 1,600 lbs | 60 lbs | 28 |
| 173071 | P3440 AAR-65 | Green | 3/4" x .040 | 3,000 | 16 x 6 | 1,900 lbs | 55 lbs | 28 |

POLYESTER STRAPPING

Can be used with hand tools or in power equipment. It has low elongation, excellent impact resistance and it offers more break strength around corners than steel. It is not affected by heat, cold or moisture. It meets government ASTM specifications and is acceptable for parcel post, road transport, rail and air-freight.





PLASTIC strapping



Polypropylene Dispenser Packs

| Item No | Stock No | Width | Length | Color | Nominal Break | Buckles | Wt/Coil |
|---------|----------|-------|--------|--------|------------------|---------|---------|
| *172007 | #1500 | 1/2" | 1200' | Black | 300 lbs | 100WB | 4 |
| 172009 | #3000 | 1/2" | 3000' | Yellow | 300 lbs | 500PB | 12 |
| 172010 | #3000 | 1/2" | 6000' | Black | 300 lbs | 250WB | 19 |
| 172012 | #3300 | 1/2" | 3000' | Black | 300 lbs | 300WB | 10 |
| 172015 | #5000 | 1/2" | 4000' | Black | 600 lbs | 250WB | 20 |

Dispenser Packs provide packaging systems for the manual strapper that are convenient, economical and easy to use. Each kit is a total, self-contained unit with strap, buckles and a tensioning tool. From bundling and closures to palletization and unitization, these strapping kits are ideal for light duty applications.

^{*} Packaged as 4 coils per carton. All others are packaged 1 coil per carton.



Polypropylene Pre-Cut Pallet Strapping

| Item No | Width x Length | Nominal Break | Pieces/ Carton | Standard Color |
|---------|-------------------|------------------|-------------------|-------------------|
| 181040 | 1/2" x 17' | 300 lbs | 500 | Yellow |
| 181045 | 1/2" x 17' | 300 lbs | 500 | White |
| 181050 | 1/2" x 17' | 300 lbs | 500 | Black |
| 181055 | 1/2" x 17' | 300 lbs | 500 | Orange |
| 181056 | 1/2" x 17' | 300 lbs | 500 | Green |
| 181057 | 1/2" x 17' | 300 lbs | 500 | Blue |
| 181058 | 1/2" x 17' | 300 lbs | 500 | Red |

Polyester Cord Strapping - Regular Duty, Stranded




| Item No | Item | Width | Yards/Coil | Wt/Coil | Approx Tensile |
|---------|-------|-------|------------|----------|-------------------|
| 174005 | 20 RS | 1/4" | 2,600 | 15.4 lbs | 300 lbs |
| 174010 | 30 RS | 3/8" | 1,750 | 16.4 lbs | 450 lbs |
| 174015 | 40 RS | 1/2" | 1,300 | 15.4 lbs | 600 lbs |
| 174020 | 50 RS | 5/8" | 1,000 | 15.2 lbs | 725 lbs |
| 174025 | 60 RS | 3/4" | 700 | 13.0 lbs | 900 lbs |

Packaged 4 coils per carton. Light duty stranded also available.

Polyester Cord Strapping - Regular Duty, Woven

| Item No | Item | Width | Yards/Coil | Wt/Coil | Approx Tensile |
|---------|-------|-------|------------|----------|-------------------|
| 174310 | 20 RW | 1/4" | 2,600 | 15.4 lbs | 300 lbs |
| 174315 | 30 RW | 3/8" | 1,750 | 15.0 lbs | 450 lbs |
| 174320 | 40 RW | 1/2" | 1,300 | 14.8 lbs | 600 lbs |
| 174325 | 50 RW | 5/8" | 1,000 | 13.4 lbs | 725 lbs |
| 174330 | 60 RW | 3/4" | 700 | 12.0 lbs | 900 lbs |

Packaged 4 coils per carton. Light duty woven also available.



Composite Cord Strapping

| Item No | Width | Length/Coil | Coil/Ctn | Wt/Coil | Approx Tensile |
|---------|-------|-------------|----------|----------|-------------------|
| 174035 | 3/4" | 2,132' | 2 | 61.0 lbs | 1,804 lbs |

Additional Cord Strapping designed for the Lumber Industry is available.

CWC PLASTIC strap tools / accessories





Manual Tensioner and Crimper/Sealer

| Item No | Item |
|------------------|---|
| 176010 | Tensioner for Polypro, Polyester and Cord Strap |
| 176043 | Domestic |
| 176030 | Regular Duty Crimper/Sealer - 1/2" |
| 176025 | Domestic |
| 176035 | Regular Duty Crimper/Sealer - 5/8" |
| 176025 | Domestic |
| 176040 176745 | Regular Duty Polyester Crimper/Sealer - 1/2" Domestic |
| 176042 176746 | Regular Duty Polyester Crimper/Sealer - 5/8" Domestic |

Economy Tensioner and Crimper/Sealer

| Item No | ltem | | |
|---------|---|--|--|
| 176612 | Tensioner for Polypro, Polyester and Cord Strap | | |
| 176620 | Economy - Long Handle Crimper/Sealer - 1/2" | | |
| 176600 | T-Bar Hand Tensioner | | |



Edge Protectors

| Item No | Style No | Gauge | Width | Length | Legs | Qty/Ctn | Wt/Ctn | Color |
|---------|-------------|-------|--------|--------|--------|---------|--------|--------------------|
| 184015 | #122 | | 2-1/2" | 1-3/4" | 1-3/4" | 1,000 | 24 lbs | Black Plastic |
| 184100 | | .120 | 2" | 2" | 3" | 1,440 | 50 lbs | Laminated Paper |
| 184104 | | .120 | 2" | 2" | 2-1/2" | 1,800 | 60 lbs | Laminated Paper |

Other sizes of edge protectors and corner boards available upon request.



Polypropylene Strap Dispenser

| Item No | ltem |
|--------------------|---|
| 176050 & 176725 | Universal Strap Cart for core sizes. Accepts 3", 6", & 8" face coils as well as 8" & 16" cores. Includes an automatic brake, sturdy wheels & a tool tray. |
| 176726 | Heavy Duty Strapping Cart accommodates core sizes: 16" x 3". This cart can handle both plastic and steel strap up to 2" wide. |



Semi-Automatic Strapping Machine

| Item No | Item |
|---------|--|
| 180002 | Handles core sizes 8" x 8" or 9" x 8". Adjustable for strap sizes 1/4" - 1/2". Weight 190 lbs. |



TIG buckles seas



Buckles

| Item No | Item | Size | Wire Dia | Qty/Ctn | Wt/Ctn |
|-----------|----------------------------|------|----------|---------|--------|
| 175025 | Wire Buckles | 1/2" | .105 | 1,000 | 14 lbs |
| 175035 | Wire Buckles | 5/8" | .120 | 1,000 | 11 lbs |
| 175045 | Wire Buckles | 3/4" | .120 | 1,000 | 21 lbs |
| | | | | | |
| 175027 HD | Wire Buckles | 1/2" | .120 | 1,000 | 18 lbs |
| 175028 HD | Wire Buckles (square wire) | 1/2" | .120 | 1,000 | 16 lbs |
| | | | | | |
| 175006 | Poly Buckles | 1/2" | N/A | 1,000 | 4 lbs |
| 175010 | Poly Buckles | 5/8" | N/A | 1,000 | 5 lbs |
| | | | | | |
| 175115 | Phosphate Buckles | 3/4" | .130 | 1,000 | 43 lbs |

BUCKLES

Buckles are a low cost method of securing plastic strapping. Metallic buckles can generally withstand greater tensioning by hand, or with a tensioning tool over plastic buckles. Because there is no permanent seal or crimp, the strap can loosen slightly through the buckle. The greatest asset of the buckle system is portability and the ability to re-tension the strap.



Seals


| Item No | Seal Type | Size | Length | Mil Gauge | Qty/Ctn | Wt/Ctn |
|---------|-----------|------|--------|-----------|---------|--------|
| 175065 | Open | 1/2" | 1.25" | .025 | 1,000 | 12 lbs |
| 175085 | Open | 5/8" | 1.25" | .025 | 1,000 | 15 lbs |
| 175100 | Open | 3/4" | 1.25" | .025 | 1,000 | 18 lbs |
| | | | | | | |
| 175060 | Closed | 1/2" | 1.25" | .020 | 1,000 | 11 lbs |
| 175075 | Closed | 5/8" | 1.25" | .025 | 1,000 | 15 lbs |
| | | | | | | |
| 175112 | Serrated | 1/2" | 1.25" | .030 | 1,000 | 15 lbs |
| 175095 | Serrated | 5/8" | 1.25" | .040 | 1,000 | 17 lbs |

Open Seals are used for light, medium and heavy duty tensioning of all strap sizes. The open seal may be applied at any time before the tension is released.

Closed Seals are used for light to medium tensioning applications. The seal must be threaded through the strap before the tensioning tool is brought into use.

Serrated Strapping Seals are used with polyester strap. They are manufactured with toothed inner surface to increase the friction between strap and seal. When used in combination with the proper tools, these seals guarantee a high seal efficiency.

How To Thread Buckles



through the center of the buckle.



Slip the loop over front tine (Farthest from you).





Pull strap down and away.





Place a strap around package. Form a new loop by folding strap

towards you.



Slip new loop over other tine.





Tension, by pulling on the strap coming from the coil.



Over 75 Years of Quality Products & Service















OAKLAND 510-352-3133 LOS ANGELES 562-903-1214 SEATTLE 206-623-0466 PORTLAND 503-223-5194 DENVER 303-375-1506 HOUSTON 713-926-3868 NEW ORLEANS 504-733-6057

www.cwestern.com



Continental Western Corporation















seals





Continental Western Corporation

 OAKLAND
 510-352-3133

 LOS ANGELES
 562-903-1214

 SEATTLE
 206-623-0466

 PORTLAND
 503-223-5194

 DENVER
 303-375-1506

 HOUSTON
 713-926-3868

 NEW ORLEANS
 504-733-6057

Distributed by:

www.cwestern.com